
CITY OF EL CAJON

PARKING TABLE

(STANDARD PARKING SPACE: 8.5' WIDE BY 18.5' LONG)

Α	B STALL WIDTH	C STALL DEPTH	D BACK-UP AND DRIVEWAY WIDTH		E SINGLE BAY WIDTH		F DOUBLE BAY WIDTH		ABUTTING PARKING BAYS		
PARKING SPACE ANGLE										H STALL OVER-LAP	I TOTAL BAY
			ONE-WAY	TWO-WAY	ONE-WAY	TWO-WAY	ONE-WAY	TWO-WAY	TO C.L.		WIDTH
20°	24.9'	14.3'	12'	24'	26.3'	38.3	10.3	52.6'	10.3'	4'	20.6
30°	17'	16.6'	12'	24'	28.6'	40.6'	45.2'	57.2'	12.9'	3.7'	25.8'
40°	13.2'	18.4'	12'	24'	30.4	42.4	48.8'	60.8	15.2'	3.3'	30.4'
45*	12'	19.1'	13'	24'	32.1'	43.1'	51.2'	62.2	16.1'	3'	32.2'
50°	11.1'	19.6'	15'	24'	34.6'	43.6'	54.2'	63.2'	16.9'	2.7'	33.8'
60.	9.8'	20.3'	18'	24'	38.3'	44.3'	58.6'	64.6'	18.2'	2.1'	36.4'
70°	9'	20.3	19'	24'	39.3'	44.3'	59.6'	64.6'	18.8'	1.5'	37.6'
80°	8.6'	19.7'	21.5'	24'	41.2'	43.7'	60.9	63.4'	19'	0.7'	38'
90°	8.5'	18.5'	24'	24'	42.5'	42.5'	61'	61'	18.5'	0,	37'

- A ANGLE OF PARKING
- B STALL WIDTH
- C STALL DEPTH
- D BACK-UP OR DRIVEWAY WIDTH
- E TOTAL WIDTH SINGLE BAY ABUTTING WALLS OR OTHER OBSTRUCTIONS (C+D)
- F TOTAL WIDTH DOUBLE BAY ABUTTING WALLS OR OTHER OBSTRUCTIONS (2C+D)
- G STALL DEPTH TO CENTER LINE OF ABUTTING PARKING BAYS (C-H)
- H DEPTH OF STALL OVERLAP
- I TOTAL WIDTH OF ABUTTING PARKING BAYS (2G)
- C.L. CENTER LINE

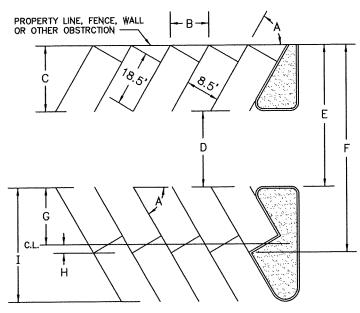

TYPICAL ABUTTING PARKING BAY WITH OVER-LAPPING STALLS